

KWANG 201



www.nguyenkhang.net
Hotline: 0906 617986

內置高壓靜電發生器

1. 適用粉末:

金屬粉, 超細粉以及各種粉末

2. 配置:

噴槍 x 1 + 主機 x 1 + 粉泵 x 1 + 粉筒 x 1 + 台車 x 1 + 油水分离器 x 1 + 氣壓調節閥 x 1

3. 技術參數:

A. 主機:

輸入電壓: 200-240v 50Hz

B. 供粉及氣源:

電磁閥控制電壓: 24V DC

輸入氣壓: 0 - 0.6Mpa

輸出氣壓: 0 - 0.5Mpa

最大耗氣量: 13.2m³/h (0.4Mpa)

粉筒容積: 55 L

C. 噴槍

輸入氣壓: ≤ 0.3Mpa

出粉量: Max. 550g/min

輸出電壓: 0-100kv

輸出電流: 0-200uA

噴槍重量: 460g

KWANG - 201 Electrostatic powder coating system :

Electrostatic powder coating system :

Build-in high voltage electrostatic generator

1. Powder applicable :

All kinds of powder including metal powder, micro powder

2. Configuration :

Powder gun x 1 + host x 1 + powder pump x 1 + trolley x 1
+ oil-water separator x 1 + air pressure regulating valve x 1

3. Technical parameter

A. Host :

Input power voltage : 200-240v 50Hz (Chinese standard)

Input power : 50w

B. Powder supply & air source :

Electromagnetic valve control power voltage : 24V DC

Input air pressure : 0 - 0.6Mpa

Output air pressure : 0 - 0.5Mpa

Max. Air consumption : 13.2m³/h (0.4Mpa)

Powder container volume : 55 L

C. Powder gun:


Input air pressure : ≤ 0.3Mpa

Output power volume : Max. 550g/min

Output power voltage : 0-100kv

Output current : 0-200uA

Gun weight : 460g

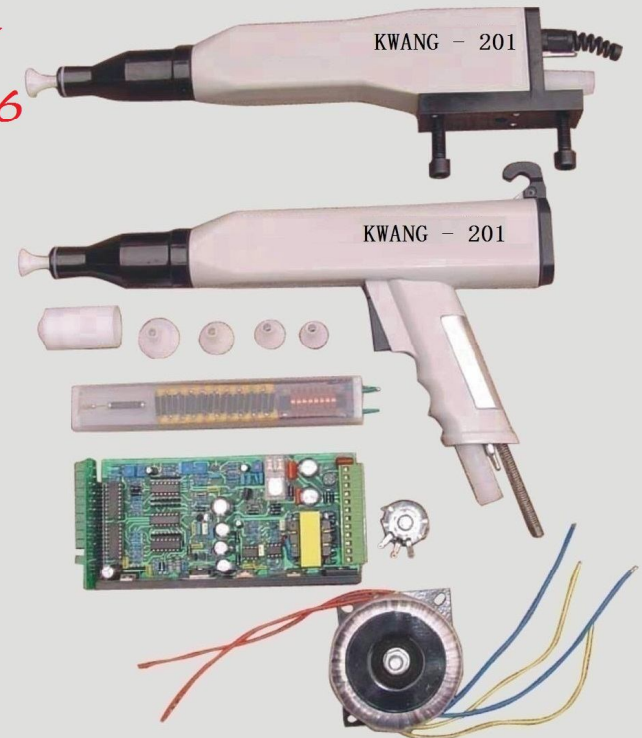

线路板接线图

1 10接电磁閥DC24V, 2 8接噴槍開關, 2 9接倍壓
模塊, 3 4接AC21V, 5 6 7接電位器, 11 12接AC6V。



倍壓模块技术数据

- 輸入電壓: 最大36V峰-峰
- 輸入電流: 最大0.5A
- 頻率: 17-40KHz
- 輸出電壓: 最大-110KV直流
- 輸出電流: 最大200uA
- 極性: 負
- 重量: 155g



www.nguyenkhang.net

Hotline: 0906 617986